


CARACTERÍSTICAS

Bridas ANSI b16.5 S-150
Entre caras segun norma
DIN3202
Certificadas ISO, CE y API

MATERIALES

Cuerpo Hierro ductil con revestimiento
EPOXI Malla de Acero Inoxidable SS304
Malla:
2": 700 micrones
2 1/2" a 4": 1190 micrones
5" y 6": 1680 micrones
8" a 12": 2000 micrones

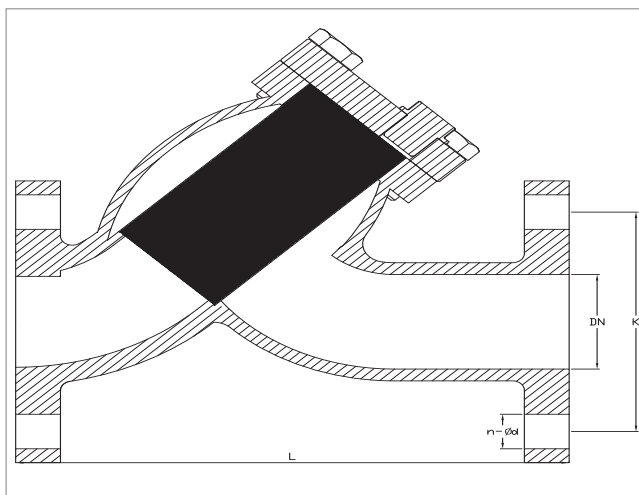

PULGADAS	DN	K	L	n-Ød
2"	DN50	120.7	225	4-19
2.5"	DN65	139.7	273	4-16
3"	DN80	152.4	292	4-19
4"	DN100	190.5	352	8-19
5"	DN125	215.9	416	8-22.4
6"	DN 150	241.5	470	8-22.4
8"	DN 200	298.5	543	8-22.4
10"	DN 250	362	660	12-25.4
12"	DN 300	432	762	12-25.4